



TOČKOVI
ZA INSTITUCIONALNE
PRIMENE

TOČKOVI PODESIVE VISINE



Točkovi Podesive Visine

MONTAŽA S PLOČOM

Osnova:	Aluminijum
Točak:	Najlon
Temperatura rada:	-15 °C - +70 °C
Raspoložive boje:	Bela, Braon




LCW7181TS.NISH (Bela)

LCB7181TS.NISH (Braon)

Točkovi podesive visine, s pločom, dimenzije 55x55mm (raspon rupa 42x42mm).
Točak od najlona. Visina od 71mm, podesiva za plus 10mm, odnosno do 81mm. U beloj ili braon boji.

UKUPNO PREPORUČENO OPTEREĆENJE / 4 TOČKA	NOSIVOST / TOČAK	F type					
		mm	mm	mm	mm	mm	mm
100	50	84	51	71 + 10	55*55	42*42	6,5

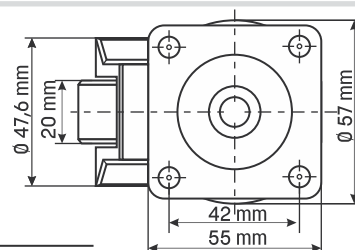


LCW8292TS.NISH (Bela)

LCB8292TS.NISH (Braon)

Točkovi podesive visine, s pločom, dimenzije 73x73mm (raspon rupa 58x58mm).
Točak od najlona. Visina od 82mm, podesiva za plus 10mm, odnosno do 92mm. U beloj ili braon boji.

500	250	101	61	82 + 10	73*73	58*58	7
-----	-----	-----	----	---------	-------	-------	---

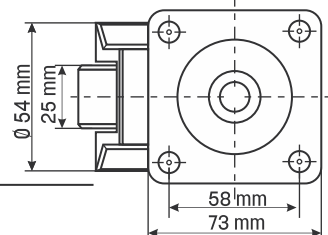


LCW102117TS.NISH (Bela)

LCB102117TS.NISH (Braon)

Točkovi podesive visine, s pločom, dimenzije 92x92mm (raspon rupa 70x70mm).
Točak od najlona. Visina od 102mm, podesiva za plus 15mm, odnosno do 117mm. U beloj ili braon boji.

UKUPNO PREPORUČENO OPTEREĆENJE / 4 TOČKA	NOSIVOST / TOČAK	F type					
		mm	mm	mm	mm	mm	mm
1000	500	125	77	102 + 15	92*92	70*70	9

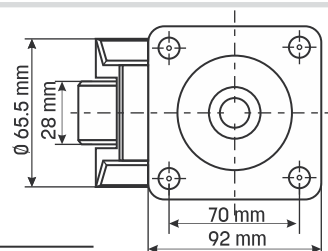


LCW120132TS.NISH (Bela)

LCB120132TS.NISH (Braon)

Točkovi podesive visine, s pločom, dimenzije 92x92mm (raspon rupa 70x70mm).
Točak od najlona. Visina od 120mm, podesiva za plus 12mm, odnosno do 132mm. U beloj ili braon boji.

1500	750	142	90	120 + 12	92*92	70*70	9
------	-----	-----	----	----------	-------	-------	---

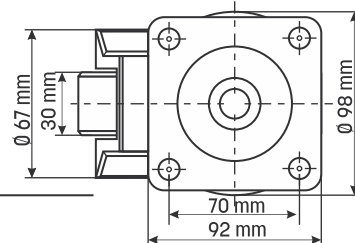

Točkovi Podesive Visine

MONTAŽA S PLOČOM



LCHW120132TS.NISH (Bela)

LCHB120132TS.NISH (Braon)

Točkovi podesive visine, s pločom, dimenzije 95x95mm (raspon rupa 70x70mm).

Točak od najlona. Visina od 120mm, podesiva za plus 12mm, odnosno do 132mm. U beloj ili braon boji.

UKUPNO PREPORUČENO OPTEREĆENJE / 4 TOČKA	NOSIVOST / TOČAK	F type					
		mm	mm	mm	mm	mm	mm
kg	kg	mm	mm	mm	mm	mm	mm
2000	1000	141	89	120 + 12	95*95	70*70	11



LCW132147TS.NISH (Bela)

LCB132147TS.NISH (Braon)

Točkovi podesive visine, s pločom, dimenzije 100x100mm (raspon rupa 70x70mm).

Točak od najlona. Visina od 132mm, podesiva za plus 15mm, odnosno do 147mm. U beloj ili braon boji.

UKUPNO PREPORUČENO OPTEREĆENJE / 4 TOČKA	NOSIVOST / TOČAK	F type					
		mm	mm	mm	mm	mm	mm
kg	kg	mm	mm	mm	mm	mm	mm
3000	1500	178	171	132 + 15	100*100	70*70	13

Točkovi Podesive Visine

MONTAŽA SA RUPOM SA NAVOJEM

Osnova:	Aluminijum
Točak:	Najlon
Temperatura rada:	-15 °C - +70 °C
Raspoložive boje:	Bela, Braon




LCW7181HS.NISH (Bela)

LCB7181HS.NISH (Braon)

Točkovi podesive visine, sa rupom sa navojem M8x10.

Točak od najlona. Visina od 71mm, podesiva za plus 10mm, odnosno do 81mm. U beloj ili braon boji.

UKUPNO PREPORUČENO OPTEREĆENJE / 4 TOČKA	NOSIVOST / TOČAK	S type				
		mm	mm	mm	mm	mm
100	50	84	51	71 + 10	M8	10

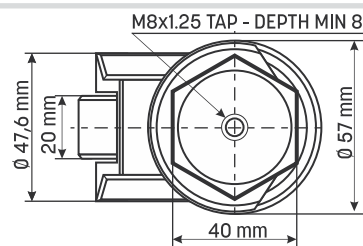



LCW8292HS.NISH (Bela)

LCB8292HS.NISH (Braon)

Točkovi podesive visine, sa rupom sa navojem M12x15.

Točak od najlona. Visina od 82mm, podesiva za plus 10mm, odnosno do 92mm. U beloj ili braon boji.

500	250	101	61	82 + 10	M12	15
-----	-----	-----	----	---------	-----	----

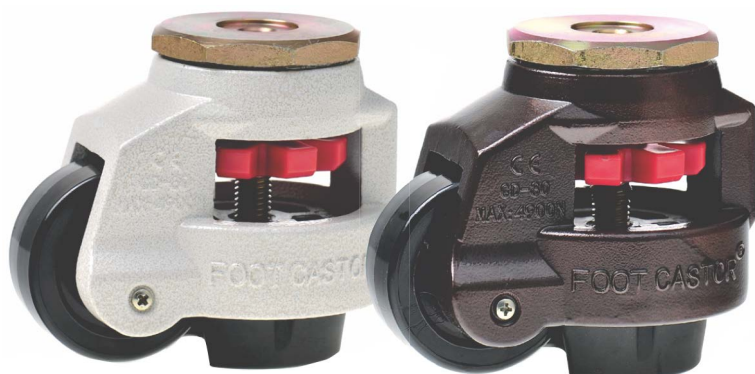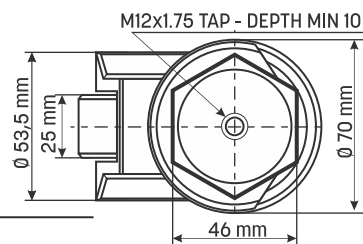


LCW102117HS.NISH (Bela)

LCB102117HS.NISH (Braon)

Točkovi podesive visine, sa rupom sa navojem M12x10.

Točak od najlona. Visina od 102mm, podesiva za plus 15mm, odnosno do 117mm. U beloj ili braon boji.

UKUPNO PREPORUČENO OPTEREĆENJE / 4 TOČKA	NOSIVOST / TOČAK	S type				
		mm	mm	mm	mm	mm
1000	500	125	77	102 + 15	M12	15

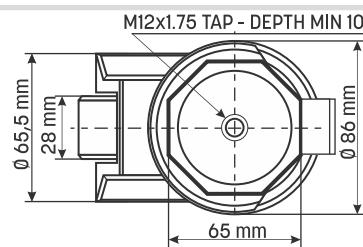


LCW120132HS.NISH (Bela)

LCB120132HS.NISH (Braon)

Točkovi podesive visine, sa rupom sa navojem M16x14.

Točak od najlona. Visina od 120mm, podesiva za plus 12mm, odnosno do 132mm. U beloj ili braon boji.

1500	750	124	90	120 + 12	M16	20
------	-----	-----	----	----------	-----	----

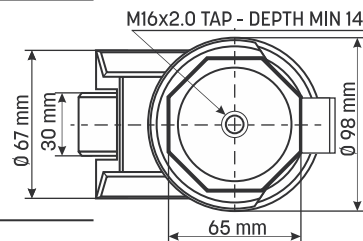







LCHW120132HS.NISH (Bela)

LCHB120132HS.NISH (Braon)

Točkovi podesive visine, sa rupom sa navojem M16x20.

Točak od najlona. Visina od 120mm, podesiva za plus 12mm, odnosno do 132mm. U beloj ili braon boji.

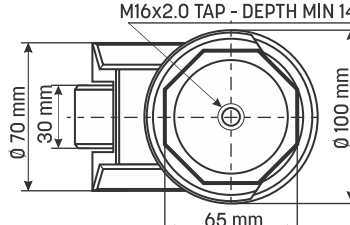UKUPNO PREPORUČENO OPTEREĆENJE / 4 TOČKA	NOSIVOST / TOČAK				S type		
kg	kg	mm	mm	mm	M16	20	
2000	1000	141	89	120 + 12	M16	20	Ø 70 mm 30 mm M16x2.0 TAP - DEPTH MIN 14 Ø 100 mm 65 mm

RODA SA

TOČKOVI ZA INSTITUCIONALNE PRIMENE

FILIJALA U SRBIJI:

Zemunska 300

11277 Ugrinovci, Beograd, SRBIJA

T: +381 11 4071280

+381 11 8480286

M: +381 628 255 783

+381 628 255 784

info@rodatockovi.rs

CENTRALA I PROIZVODNI POGON

Ind. Zona Sindos

P.O. Box 1171

570 22 SOLUN, GRČKA

T: +30 2310 795 612

+30 2310 795 613

F: +30 2310 795 614

info@sind.roda.gr

FILIJALA SOLUNA:

Monastiriou 137

546 27 SOLUN, GRČKA

T: +30 2310 517 058

+30 2310 540 527

F: +30 2310 518 223

info@thes.roda.gr